


# Reductor Corona Sinfin

NRV Tamaño 50



mairisa

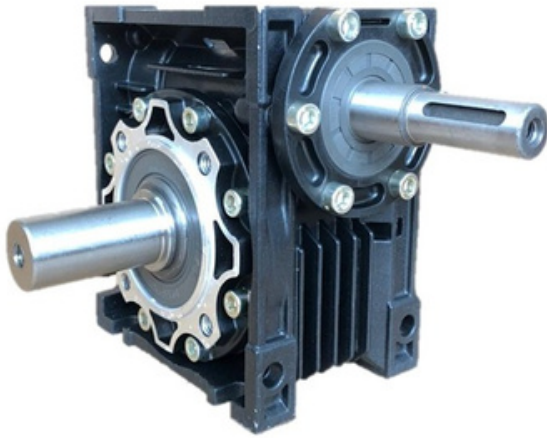

Modelo	Radio	RPM	Torque (in-lbs)	Max HP	OHL (lbs)
NRV 050	5	350	549	3.43	322
	7.5	233	628	2.64	369
	10	175	637	2.06	406
	15	117	655	1.48	464
	20	88	646	1.14	510
	25	70	619	0.90	551
	30	58	743	0.96	586
	40	44	672	0.70	643
	50	35	646	0.57	694
	60	29	602	0.47	739
	80	22	575	0.38	810
100	18	487	0.28	866	

Dimensiones	Pulgadas
A	3.62
AB	3.54 (4.72)
AC	2.36
AJ	3.35 (3.54)
AJ1	3.35
AK	2.76
AK1	2.76
AQ	4.72
B	3.35
B2	7.83
BA	45°
BB	0.20
BD	4.92
BE	0.35
BF	.43, 4 pl.
BR	3.94
BU	M8 Tap 0.39 deep, 4 pl.
CA	45°
CE	4.33
DY	3.31
E	3.15
EA	3.54
F	2.76
G	0.28
H	0.34
K	1.69
O	5.67
R	1.11
RB	0.70
RH	1.12
S	0.250
SB	0.188
SH	0.250
U	1.000
UH	1.000
UT	3/8-16
V	1.97
VA	2.11
VB	1.181
VN	1.58
WG	1.71
UB	0.625
UR	1/4-20
Y	1.97
YE	1.58
YF	2.52
<b>Clave de entrada</b>	
Longitud	1.125
Cuadrado	0.188
<b>Clave de salida</b>	
Longitud	1.500
Cuadrado	0.250
Peso (lb)	8

