


Reductor Corona Sinfin

NRV Tamaño 63



mairisa

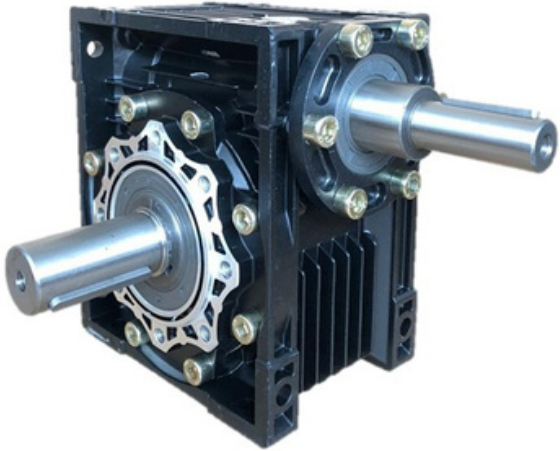

Modelo	Radio	RPM	Torque (in-lbs)	Max HP	OHL (lbs)
NRV 063	7.5	233	1133	4.77	463
	10	175	1150	3.67	510
	15	117	1239	2.76	583
	20	88	1194	2.05	641
	25	70	1150	1.64	692
	30	58	1416	1.77	736
	40	44	1283	1.27	807
	50	35	1194	1.01	871
	60	29	1150	0.86	928
	80	22	1079	0.66	1017
100	18	1044	0.57	1088	

Dimensiones	Pulgadas
A	4.41
AB	3.23 (4.41)
AC	2.83
AJ	5.91 (5.91)
AJI	3.74
AK	4.53 ⁰ / _{-0.0007}
AK1	3.15 ⁺⁰ / _{-0.0018}
AQ	5.67
B	4.06
B2	9.41
BA	45°
BB	0.24
BD	7.09
BE	0.39
BF	.43, 4 pl.
BR	4.33
BU	M8 Tap 0.55 deep, 8 pl.
CA	45°
CE	5.60
DY	4.02
E	3.94
EA	4.13
F	3.35
G	0.32
H	0.33
K	1.93
O	6.85
R	1.23
RB	0.83
RH	1.24
S	0.250
SB	0.188
SH	0.250
U	1.125 ⁺⁰ / _{-0.0005}
UH	1.125 ^{+0.001} / ₋₀
UT	3/8-16
V	2.36
VA	2.50
VB	1.417
VN	1.97
WG	2.09
UB	0.750
UR	1/4-20 ⁺⁰ / _{-.0005}
Y	2.48
YE	1.97
YF	3.15
Clave de entrada	
Longitud	1.500
Cuadrado	0.188
Clave de salida	
Longitud	1.875
Cuadrado	0.250
Peso (lb)	14

