


Reductor de Velocidad Doble Reducción

NMRVD50/130

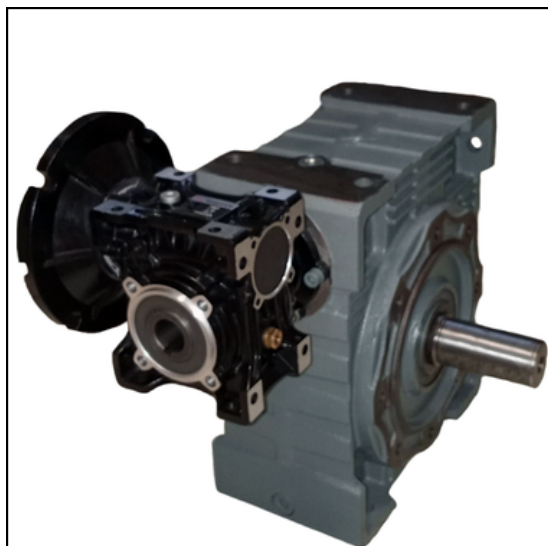

Modelo	Relacion	RPM	Torque (in-lbs)	Max HP
NMRVD50/130 200:1	200	8.75	14,406	2
NMRVD50/130 300:1	300	5.83	21,609	2
NMRVD50/130 400:1	400	4.38	28,811	2
NMRVD50/130 600:1	600	2.92	21,609	1
NMRVD50/130 750:1	750	2.33	20,258	0.75
NMRVD50/130 900:1	900	1.94	24,310	0.75
NMRVD50/130 1200:1	1200	1.46	21,609	0.50
NMRVD50/130 1500:1	1500	1.17	27,011	0.50
NMRVD50/130 1800:1	1800	0.97	16,206	0.25
NMRVD50/130 2400:1	2400	0.73	21,609	0.25

Tamaño	A	G	G1	H	H1	I	R	H2	I2	N2	R2	Z
NMRVD50/130	5.66"	4.29"	6.69"	5.80"	5.80"	5.11"	7.38"	2.83"	2.48"	2.08"	4.21"	9.64"

