


# Reductor Corona Sinfín

NMRV Tamaño 90



mairsa

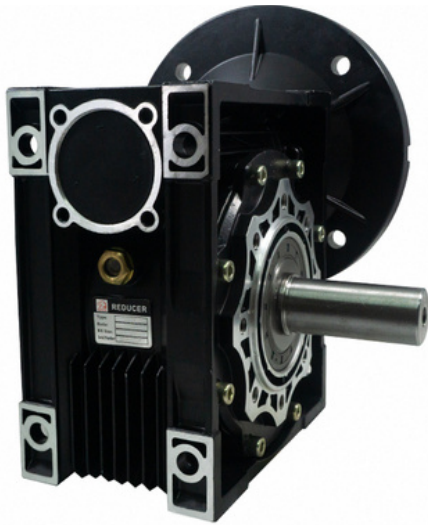

Modelo	Radio	RPM	Torque (in-lbs)	Max HP	OHL (lbs)
NMRV 090 NRV 090	7.5	233	2566	10.56	631
	10	175	2743	8.56	694
	15	117	3185	6.86	794
	20	88	3141	5.19	873
	25	70	3008	4.08	942
	30	58	3628	4.31	1003
	40	44	3185	2.95	1100
	50	35	3008	2.32	1187
	60	29	2831	1.90	1264
	80	22	2522	1.39	1386
100	18	2389	1.12	1482	

Dimensiones	Pulgadas
A	5.51
AB	4.37
AC	4.06
AJ	6.89
AJ1	5.12
AK	5.98 <sup>0</sup> <sub>-0.0001</sub>
AK1	4.33 <sup>+0</sup> <sub>-0.0021</sub>
AQ	8.11
B	5.12
B2	12.13
BA	45°
BB	0.24
BD	8.27
BE	0.51
BF	.55, 4 pl.
BR	6.30
BU	M10 Tap 0.71 deep, 8 pl.
CA	45°
CE	7.87
DY	5.32
E	5.51
EA	5.63
F	3.94
G	0.43
H	0.51
K	2.83
O	9.37
R	1.51
RB	0.96
RH	1.52
S	0.313
SB	0.188
SH	0.313
U	1.375 <sup>+0</sup> <sub>-0.0005</sub>
UH	1.375 <sup>+0.001</sup> <sub>-0</sub>
UT	1/2-13
V	3.15
VA	3.33
VB	1.772
VN	2.36
WG	2.64
UB	0.875
UR	1/4-20 <sup>+0</sup> <sub>-0.0005</sub>
Y	3.54
YE	2.76
YF	4.02
<b>Clave de entrada</b>	
Longitud	1.875
Cuadrado	0.188
<b>Clave de salida</b>	
Longitud	2.500
Cuadrado	0.313
Peso (lb)	29

