



Reductor Corona Sinfin

NRV Tamaño 50

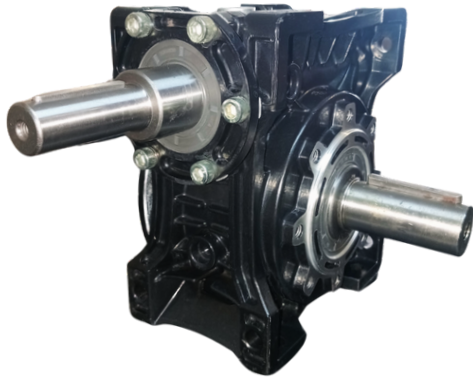

Modelo	Radio	RPM	Torque (in-lbs)	Max HP	OHL (lbs)
NRV 050	5	350	549	3.43	322
	7.5	233	628	2.64	369
	10	175	637	2.06	406
	15	117	655	1.48	464
	20	88	646	1.14	510
	25	70	619	0.90	551
	30	58	743	0.96	586
	40	44	672	0.70	643
	50	35	646	0.57	694
	60	29	602	0.47	739
	80	22	575	0.38	810
	100	18	487	0.28	866

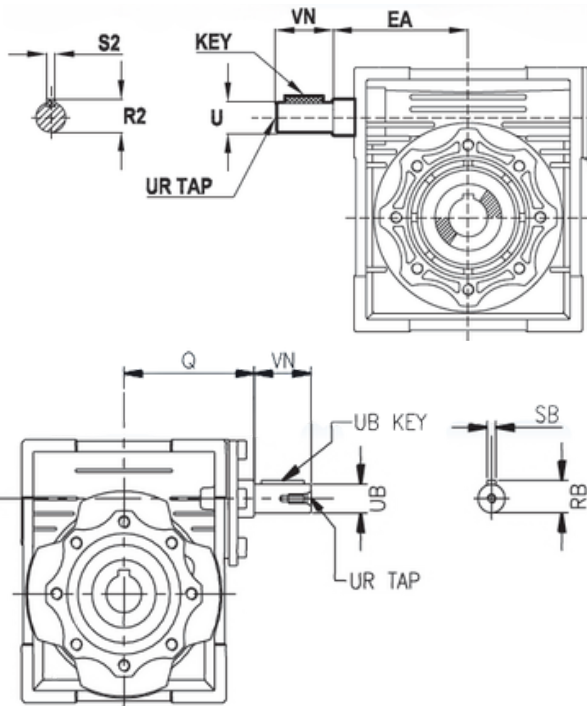

Dimensiones	Pulgadas
A	3.62
B	3.31
BA	3.35
BC	3.94
BH	45
BK	2.756 ⁺⁰ / _{-0.0018}
BL	M8x10
C	1.97
D	2.36
E	3.15
F	2.76
G	0.28
H	0.33
J	4.76
K	1.93
L	3.35
M	3.43
N	1.57
O	5.67
P	3.54
Q	2.91
T	2.52
Z	3.92
RH	1.11
SH	0.250
UH	1.000 ^{+0.001} / ₋₀
VB	1.18
R	1.11
S	0.250
U	1.000 ⁺⁰ / _{-0.0005}
U KEY	0.250x1.500
UT	3/8 - 16
V	1.97
VA	2.11
Y	7.83
EA	2.52
U	0.625 ⁺⁰ / _{-0.0006}
VN	1.58
UR	1/4 - 20
S2	0.1875
R2	0.70
KEY	0.1875x1.125

